

Lecture 6

BME 444 - Control Systems

By the end of this lecture students will be able to:

- Create a state-space representation of linear, time-invariant systems

I. Introduction

- A. So far we have practiced writing the DEs that describe physical systems
- B. These are often *coupled* differential equations; the same variables often appear in more than one equation
- C. We then practiced writing these equations in the form of a transfer function in the LaPlace domain
- D. This method works fine if the system has only one input and one output and is linear
- E. If not, we need another method—state-space
- F. Summary of the two methods:
 1. Classical, or frequency domain
 - a) Con: Can only use linear, time-invariant systems (or those that can be approx as this); initial conditions are always 0
 - b) Pro: Easy to see how system will behave (stability and transient response) by looking at equation; easy to adjust settings to desired response
 2. Modern, time domain, or state-space
 - a) Pro: can do non-linear systems and systems with nonzero initial conditions; time varying systems too
 - b) Con: not as intuitive


II. State-variable equations

- A. All systems have a group of *state variables* that define all characteristics of a system
- B. Examples:
 1. Current or voltage in circuits, position and velocity in mechanical systems, pressure in fluid systems, concentration in chemical systems
- C. The state variables are the minimum number of variables that you need to describe the system


- D. The variable x_n is used to represent the state variables
 - 1. n is the total # of state variables; also the order of the system
- E. The variable u_r is used to represent the input(s)
 - 1. r is the total number of input variables
- F. The *state-variable equations* are n DEs that are the first-order derivatives of each state variable
- G. Example:

$$\dot{x}_1 = 2x_1 + 3x_2 + 4u_1$$

- H. **Important:** There are many combinations of possible state variables. The only rule you must obey is not to use variables that are linearly dependent.
- I. Example 1. Write the state-variable equations for the system shown below.

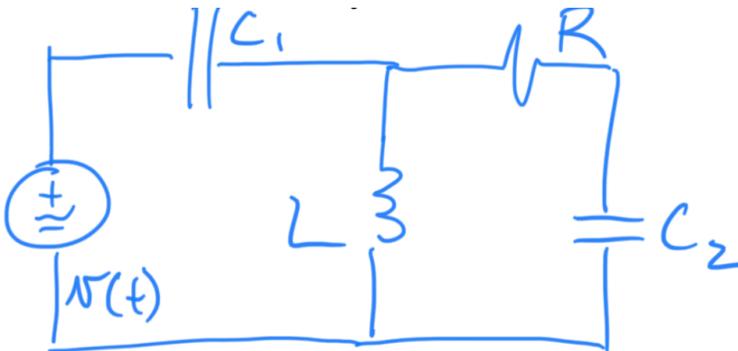

J. Student Example 1. Write the state-variable equations for the system shown below.

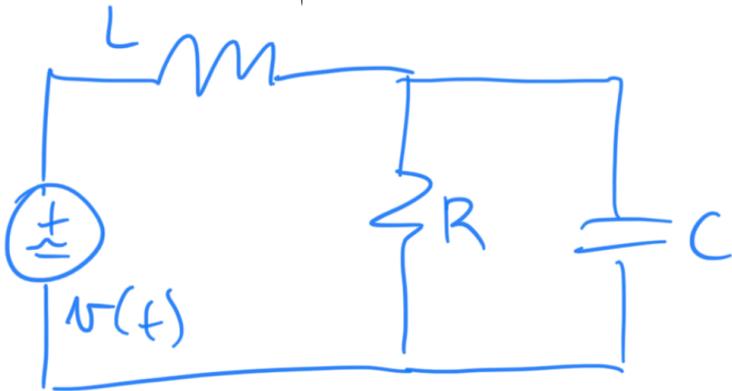

III. State-space representation

- A. We just derived state-variable equations for two different systems.
- B. If the DEs are linear, we can write them in vector-matrix format:

- 1. The state-variable equation

$$\dot{\mathbf{x}} = \mathbf{Ax} + \mathbf{Bu}$$

- 2. The output equation

$$\mathbf{y} = \mathbf{Cx} + \mathbf{Du}$$

- C. Each of these letters stand for:

\mathbf{x} = state vector (vector of state variables)

$\dot{\mathbf{x}}$ = derivative of \mathbf{x}

\mathbf{y} = output vector (vector of output eqs.)

\mathbf{u} = input or control vector

\mathbf{A} = system matrix

\mathbf{B} = input matrix

\mathbf{C} = output matrix

\mathbf{D} = feed-forward matrix

- D. Quick refresher on how matrix multiplication works:

E. Example. Convert the following state-variable equations into $\dot{\mathbf{x}} = \mathbf{Ax} + \mathbf{Bu}$ matrix-vector format.

$$\dot{x}_1 = -6.2x_1 - 2.3x_2 + 8.4x_3$$

$$\dot{x}_2 = -x_2 + 2.7x_3 + 3u_1$$

$$\dot{x}_3 = -4.1x_1 - 1.5x_2 + 3.9x_3 + 4u_2$$

$$\dot{x} = \begin{bmatrix} \dot{x}_1 \\ \dot{x}_2 \\ \dot{x}_3 \end{bmatrix} = \begin{bmatrix} -6.2 & -2.3 & 8.4 \\ 0 & -1 & 2.7 \\ -4.1 & -1.5 & 3.9 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix} + \begin{bmatrix} 0 & 0 \\ 3 & 0 \\ 0 & 4 \end{bmatrix} \begin{bmatrix} u_1 \\ u_2 \end{bmatrix}$$

$$\dot{x} = \mathbf{A}x + \mathbf{B}u$$


F. Now, we go back to our previous examples and convert them into correct state-space representation.

G. Example 1, cont'd. Write in state-space representation. Assume output is $v_{c2}(t)$.

H. Student example 1, cont'd. Write in state-space representation. Assume output is current through the resistor.

IV. State-space representation of mechanical systems

- A. Much easier as you just need to write the equations for each mass.
- B. Example 2. Write the state-space representation of the system below. Assume there is no output.

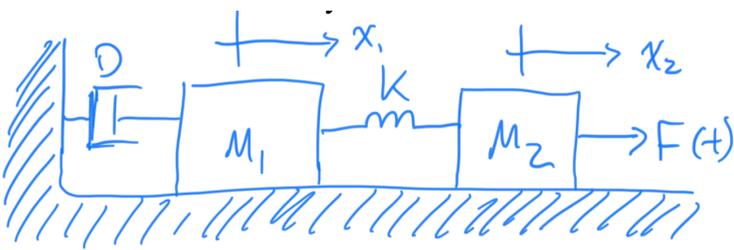

C. Student example 2. Write the state-space representation of the system below. Assume the output is $x_3(t)$.

